



# Manual Data Configuration

Please wait a couple of minutes after setting it up.

## Android (MY Touch, G1, MOTO Cliq & Behold 2)

- (1) Press **Menu** button.
- (2) Tap **Settings > Wireless Controls or Wireless Networks > Mobile Networks.**  
→ Check if **“Data Roaming”** and **“Use Only 2G Networks”** are both **UNCHECKED**.
- (3) Tap **Access Point Names**.
- (4) Press **Menu** button and select **New APN**.
- (5) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Server: **<Blank>**
  - MMSC: **http://mmsc.cingular.com**
  - MMS Proxy: **<Blank>**
  - MMS Port: **<Blank>**
  - MCC: **<Blank>**
  - MNC: **<Blank>**
  - APN Type: **<Blank>**
- (6) Press **Menu** and then **Save**.
- (7) \*For Samsung Behold II press **##87927#**



# Blackberry Standard

\*Reminder\* Phones that are purchased from Verizon cannot be configured on our network such as the Blackberry Storm and the Blackberry Storm 2.

- (1) Download [Blackberry Desktop Manager](#) for either PC or MAC.
  - Double click on the “.exe” file and install **Blackberry Desktop Manager**.
- (2) Then, download [Mini Opera](#).
  - Choose your **phone model**.
  - Download **Opera Mini** and save the “ZIP” file onto your **Desktop**.
  - Locate the “ZIP” file on your Desktop.
  - Right-click on the **file** and click “**Extract All**”.
- (3) Go to the **Blackberry Desktop Manager**.
  - Go to **applications** and import **files**.
  - Find **Opera Mini** and click on **Plus (+)** symbol to the Far Right and install.
  - The application summary should be at the very bottom of the screen.
  - Please make sure the Opera Mini reads and says install **next** to the application.
  - Apply all settings and sync. (\*If you receive an error message when you apply. Click on the screen again to refresh it and the Opera Mini should appear in the installation list.)
- (4) Once installed, go to **Blackberry Downloads** file and install **Opera Mini**.
- (5) Please make sure you check that Wi-Fi is turned **off** and all your **At&t** service books are deleted.
  - Options > Advanced Options > Service book
- (6) Go to **Options > Advanced Options > TCP/IP**. Be sure there is a **check mark** for APN Setting Enable and for the APN type **att.mvno**.
  - Make sure that **APN Authentication** is NOT checked.
  - Then, click on **Blackberry Menu Button** and save.

20 WIRELESS

# HTC Standard (HTC HD2, HTC Dash, HTC Touch Pro 2, Google Nexus One, G1, & G2)

## HTC HD2

### Internet Settings:

- (1) Tap on **Start > Settings icon > Wireless Controls > Menu > Connections > Advanced > Select networks > New.**
  - Connection Name: **H2O Wireless**
  - Select Modem: **Cellular Line (GPRS)**
  - Enter APN: **att.mvno**
- (2) Leave all fields blank and Tap **Finish.**
- (3) Tap on **Manage Existing Connections.**
  - Make sure **H2O Wireless** is selected.

### MMS Settings:

- (1) Tap on **Messages > Menu (on the bottom right) > Settings > Options > Menu (on the bottom right) > MMS Server > New.**
- (2) Enter the following information:
  - Server Name: **H2O Wireless**
  - IP Address: **66.209.11.33**
  - Port: **80**
  - Server Address: **http://mmsc.cingular.com**
  - Connect via: **<Blank>**
- (3) Tap and hold **H2O Wireless.**
- (4) Tap on **Set as default.**

## HTC Dash (Windows Phone & Windows Mobile)

### Internet Settings:

- (1) Tap **Start > Settings > Connections > Cellular Line (GPRS, 3G)**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - Connect to: **Internet**
  - APN: **att.mvno**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Primary dns: **<Blank>**
  - Secondary dns: **<Blank>**
  - IP address: **<Blank>**
- (3) Press **Done > Start > Internet Explorer > Menu > Tools > Options > Connections > "Automatically Detect Settings"** should be checked > Done.

# HTC Touch Pro 2


## Internet Settings:

- (1) Select **Settings > Communications > Data Connections > Add New Modem**
- (2) Enter the following information:
  - Connection name: **H2O Wireless**
  - Modem: **Cellular Line, GPRS**
  - APN: **att.mvno**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Domain: **<Blank>**
- (3) Select **Finish**.

# Google Nexus One, G1, & G2

## Internet Settings:

- (1) Press the **menu** button (on front of phone).
- (2) Tap **Settings**.
- (3) Tap **Wireless Controls**.
- (4) Tap **Mobile Networks**.
- (5) Enter the following details:
  - APN: **att.mvno**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Server: **<Blank>**
  - MMSC: <http://mmsc.cingular.com>
  - MMS Proxy: **66.209.11.33**
  - MMS port: **80**
  - MCC: **<Blank>**
  - MNC: **<Blank>**
  - Authentication type: **<Blank>**
  - APN Type: **<Blank>**

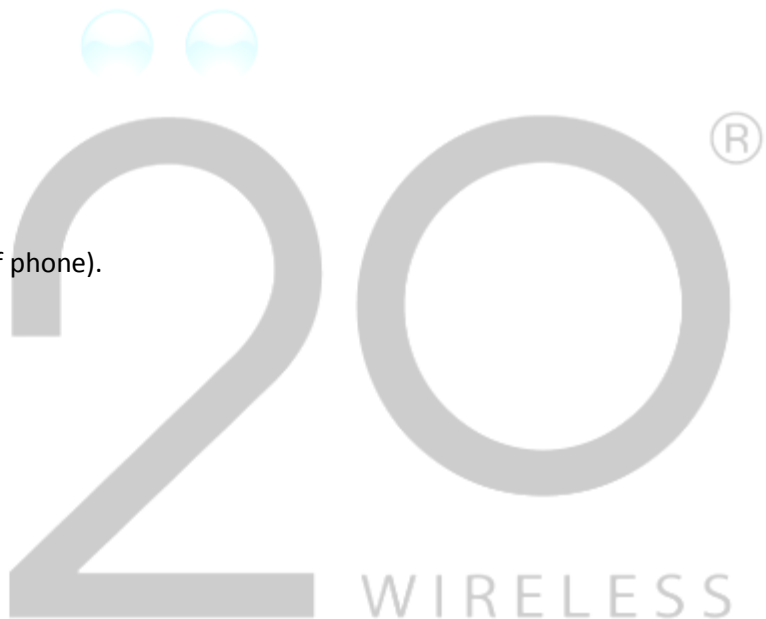

# LG Standard

## Internet Settings:

- (1) Select **Menu > Settings > Connection > Network Profile.**
- (2) Enter the following information:
  - Connection title: **H2O Wireless**
  - Auth: **<Blank>**
  - User name: **<Blank>**
  - Password: **<Blank>**
  - APN: **att.mvno**

## Browser Settings:

- (1) Select **Menu > Media Net (if At&t) > Browser Settings > Accounts > Options > New.**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - Homepage: **<User Preference>**
  - Connection Type: **TCP without proxy**
  - Security: **Non-Secure**
  - Time out: **150**
  - Network profile: **H2O Wireless**
- (3) Select **Save.**
- (4) Check the box next to **H2O Wireless.**

## MMS Settings:

- (1) Select **Messages > Message Settings > MMS > Message Center > Options > New.**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - MMSC URL: **http://mmsc.cingular.com**
  - MMSC Proxy: **66.209.11.33**
  - MMSC Port: **80**
  - Connection Mode: **TCP w/o Proxy**
  - Network Profile: **H2O Wireless**
- (3) Select **Save > Activate.**

# LG KP500

## Internet Settings:

- (1) Select **Menu > Settings > Connection > Access points.**  
→ Add **Profile.**
- (2) Enter the following information:  
→ Connection title: **H2O Wireless**  
→ Bearer: **GPRS**  
→ Authentication: **<Blank>**  
→ Username: **<Blank>**  
→ Password: **<Blank>**  
→ APN: **att.mvno**
- (3) Select **Save > Back to Connectivity > Internet profiles > Add profile.**
- (4) Enter the following information:  
→ Connection title: **H2O Wireless**  
→ Use proxy: **On**  
→ Proxy server address: **66.209.11.33**  
→ Proxy server port: **80**  
→ APN: **att.mvno**
- (5) Select **Save > Internet > Settings > Profiles > Add Profile.**  
→ Connection title: **H2O Wireless**  
→ Internet Profile: **H2O Wireless**
- (6) Select **Save > Activate H2O Wireless.**

## MMS Settings:

- (1) Select **Menu > Settings > Connectivity > Internet Profiles > Add Profile.**
- (2) Enter the following information:  
→ Connection title: **H2O Wireless**  
→ Use proxy: **On**  
→ Proxy server address: **66.209.11.33**  
→ Proxy server port: **80**  
→ APN: **att.mvno**
- (3) Select **Multi Msg Center.**
- (4) Add **Center** and enter the following information:  
→ Connection title: **H2O Wireless**  
→ MMSC URL: **http://mmsc.cingular.com**  
→ MMS profile: **H2O Wireless**
- (5) Select **Save > Yes** to activate.

# Motorola RAZR v3

## Internet Settings:

- (1) Select **Main Menu > Settings > Web Access > Web Sessions > New Entry.**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - Homepage: **<User preference>**
  - Proxy 1: **66.209.11.33**
  - Port 1: **80**
  - Domain 1: **<Blank>**
  - DNS1: **<Blank>**
  - DNS2: **<Blank>**
  - GPRS APN: **att.mvno**
  - Username: **<Blank>**
  - Password: **<Blank>**
- (3) Select **Done.**
- (4) With **H2O Wireless** highlighted, select **Options > Set as Default.**


## MMS Settings:

- (1) Select **Main Menu > Messaging > Options > Setup > Message Setup > Multimedia Message Setup > Server Info. > Options > New.**
- (2) Enter the following information:
  - Service Name: **H2O Wireless**
  - Server address: **proxy.mvno.H2OMobileweb.com**
  - Web Session Name: select **H2O Wireless**
- (3) Select **Done > H2O Wireless** and there will be a check next to it that indicates it will be using that mms profile.

# Nokia Standard (5230)

## Internet Settings:

- (1) Select **Main Menu > Settings > Configuration Settings > Personal Configuration Settings > Add New > Services (or Web) > Account Name.**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - Homepage: **<user preference>**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - APN: **att.mvno**
  - Proxy: **Disable**
  - Proxy Gateway field: **66.209.11.33**
  - Proxy Port: **80**
  - Data Bearer: **GPRS**
  - Bearer Settings: **GPRS access point**
- (3) Select **Authentication.**
  - Select **Normal** and select **OK.**
- (4) Username: **<Blank>**  
Password: **<Blank>**
- (5) Select **Back** twice > **H2O Wireless > Options > Activate Service Settings.**
- (6) Press **RED End Key** to return to the home screen.

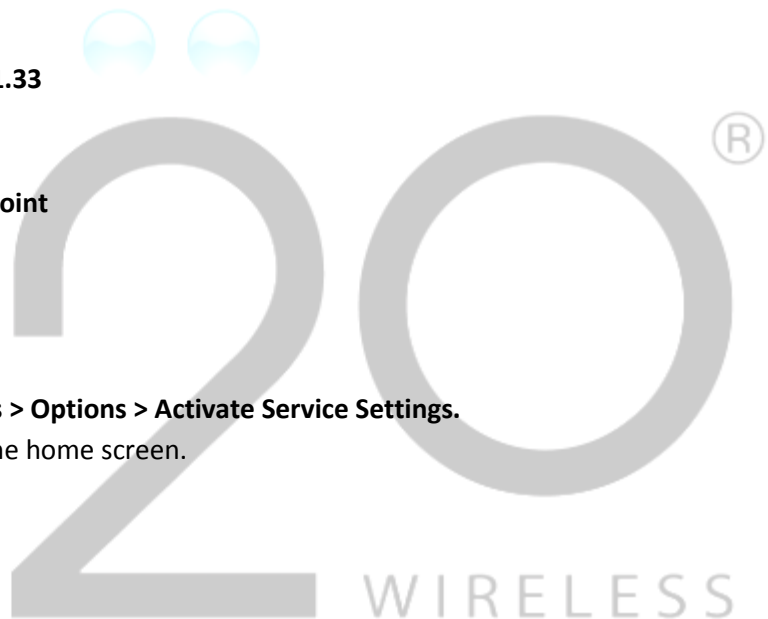

# Nokia 5230

## Internet Settings:

- (1) Select **Menu > Settings > Connectivity > Destinations > Internet > Options > New Access Point.**
- (2) Tap on **No > Packet data > Text field.**  
→ Enter **H2O Wireless** and tap **Green Check mark.**  
→ Tap **OK.**
- (3) Highlight **H2O Wireless** and tap **Options > Edit > Access Point Name.**  
→ Enter **att.mvno** and tap **Green Check mark.**  
→ Tap **OK.**
- (4) Tap **Homepage.**  
→ Enter **Homepage <user preference>** and tap **Green Check mark.**
- (5) Tap **OK > Options > Advanced Settings > Proxy Server Address.**  
→ Enter **66.209.11.33** and tap **Green Check mark.**
- (6) Tap **OK > Proxy Port Number.**  
→ Enter **80** and tap **Green Check mark.**
- (7) Tap **OK > Back (until you reach the Main Menu Screen) > Internet icon > Web icon > Options > Settings > General > Access point > Internet > Options > Select Access point.**
- (8) Highlight **H2O Wireless** and tap **OK.**

## MMS Settings:

- (1) Select **Menu > Settings > Connectivity > Destinations > Multimedia Msg. > Options > New Access Point.**
- (2) Tap on **No > Packet data > Text field.**  
→ Enter **H2O Wireless** and tap **Green Check mark.**  
→ Tap **OK.**
- (3) Select **New Access Point.**  
→ Highlight the new access point and then tap **Options.**
- (4) Tap on **Edit > Access Point Name.**  
→ Enter **att.mvno** and tap **Green Check mark.**
- (5) Tap on **OK > Homepage > Text field.**  
→ Enter **H2O Wireless.**
- (6) Tap **OK > Options > Advanced Settings > Proxy server address.**  
→ Enter **66.209.11.33** and tap **Green Check mark.**
- (7) Tap **OK > Proxy Port Number.**  
→ Enter **80** and tap **Green Check mark.**
- (8) Tap on **OK > Back (until you reach the Main Menu Screen) > Messaging icon > Options > Settings > Multimedia Message > Access point > MMS > H2O Wireless.**

# Samsung Standard (Behold, A-Series & T-Series)

## Internet Settings:

- (1) Enter **\*#87927#**.
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Auth Type: **<Blank>**
  - Protocol: **HTTP**
  - Home URL: **<user preference>**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Linger time: **<Blank>**
- (3) Select **Save**.

## MMS Settings:

- (1) Enter **\*#87667#**.
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Auth Type: **<Blank>**
  - Protocol: **HTTP**
  - Home URL: **<user preference>**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Linger time: **<Blank>**
- (3) Select **Save**.

## Samsung Behold (Highlight, Memoir & Solstice)

## Internet Settings:

- (1) Enter **\*#6984125#**.
- (2) Select **Admin Setting > Network > Call Settings > Connections**.
- (3) Select **Network Profiles**.
  - Delete **DM Profile and TMO\_DS Profile**.
- (4) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Auth Type: **<Blank>**
  - Protocol: **HTTP**
  - Home URL: **<user preference>**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Linger time: **<Blank>**
- (5) Select **Internet** (you will need to edit the Browser Profile.)

## MMS Settings:

- (1) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Proxy: **66.209.11.33**
  - Home URL: **<Blank>**

# Samsung A-Series Phone

## Internet Settings:

- (1) Select **Menu > Settings > Application Settings > Browser Settings > Options > New.**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Auth Type: **<Blank>**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Protocol: **HTTP**
  - Home URL: **<user preference>**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Linger time: **<Blank>**
- (3) Highlight **H2O Wireless** and then select **Save.**

## MMS Settings:

- (1) Select **Menu > Settings > Application Settings > Messaging Settings > Multimedia Message > Multimedia Message Profiles > Options > New.**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Auth Type: **<Blank>**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Protocol: **HTTP**
  - Home URL: **<user preference>**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Linger time: **<Blank>**
- (3) Select **Save.**
- (4) Highlight **H2O Wireless** and then select **Save.**

# Samsung T-Series Phone

## Internet Settings:

- (1) Enter **\*#87927#.**
- (2) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Auth Type: **<Blank>**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Protocol: **HTTP**
  - Home URL: **<user preference>**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Linger time: **<Blank>**
- (3) Select **Save.**

## MMS Settings:

- (1) Enter **\*#87927#.**
- (2) Select **MMS.**
- (3) Enter the following information:
  - Name: **H2O Wireless**
  - APN: **att.mvno**
  - Auth Type: **<Blank>**
  - Username: **<Blank>**
  - Password: **<Blank>**
  - Protocol: **HTTP**
  - Home URL: **<user preference>**
  - Proxy: **66.209.11.33**
  - Port: **80**
  - Linger time: **<Blank>**
- (4) Select **Save.**